

Amarr®

OAK SUMMIT® COLLECTION




Long Panel Bead Board* with Moonlite DecraTrim (LPBB24)

Self-expression shouldn't cost a fortune.

With Amarr's Oak Summit Collection, it won't. These durable steel doors offer an attractive carriage house look.

Choose from a variety of door colors, decorative hardware, and window accents. Customize your home with Amarr's most affordable carriage house door.

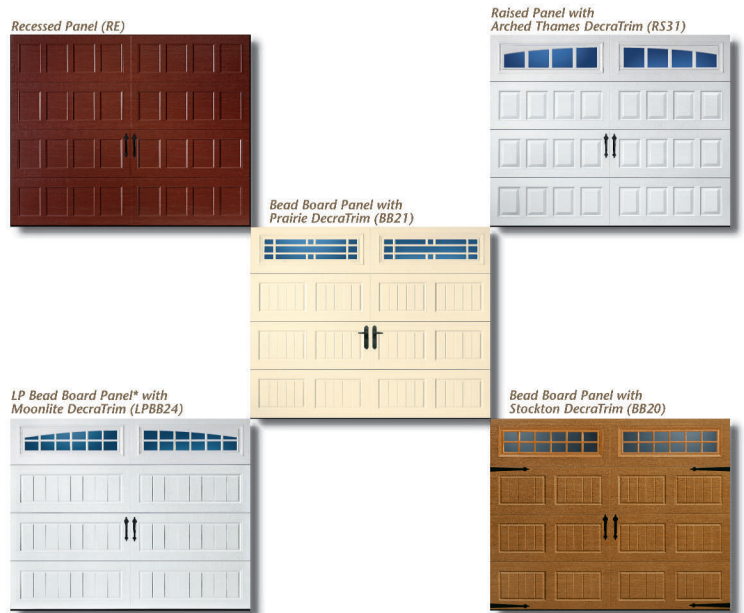


Photos shown with optional decorative hardware or locks.



Recessed Panel with Thames DecraTrim (RE30)

PANEL DESIGNS

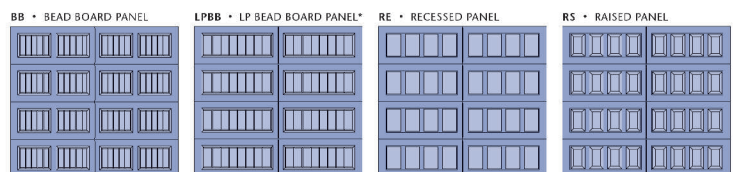

*Long Panel Bead Board not available on Oak Summit 3000

OAK SUMMIT® COLLECTION

Construction



STEEL

1000

Single-Layer: Steel

Get value and durability with an Oak Summit 1000 single-layer steel door. These heavy-duty steel doors are durable, reliable, and low maintenance.

- Heavy-Duty Exterior Steel
- Durable, Reliable, Low Maintenance




2000

Double-Layer: Steel + Insulation

An Oak Summit 2000 double-layer door provides durable, low maintenance features, plus a layer of vinyl-coated insulation for increased thermal properties and quieter operation.

- Heavy-Duty Exterior Steel
- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene Thermal Insulation with Vinyl Backing
- Energy Efficient
- Quiet Operation

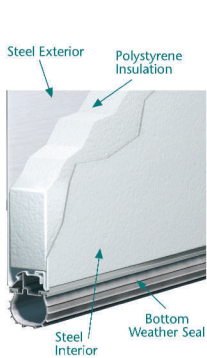

3000


Triple-Layer: Steel + Insulation + Steel

For the toughest, energy-efficient steel door, an Oak Summit 3000 triple-layer door includes the ultimate in thermal properties, plus a layer of steel for a finished interior look and added durability.


- Heavy-Duty Exterior and Interior Steel
- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene Thermal Insulation
- Superior Energy Efficiency
- Extra Quiet Operation

Options

DECRA TRIM WINDOW INSERTS

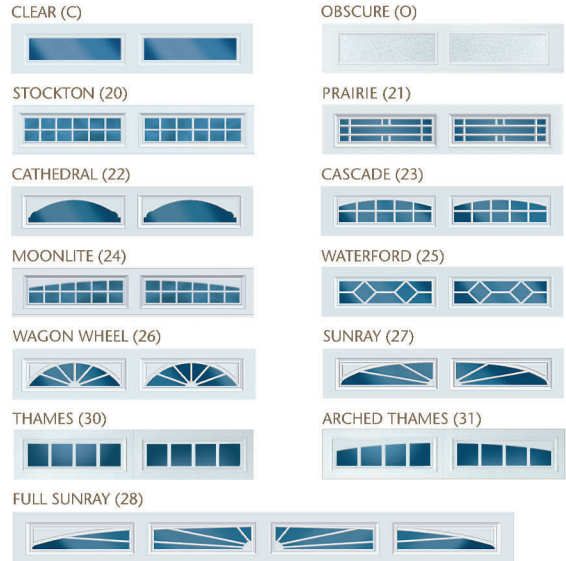

DECRA GLASS™ WINDOWS

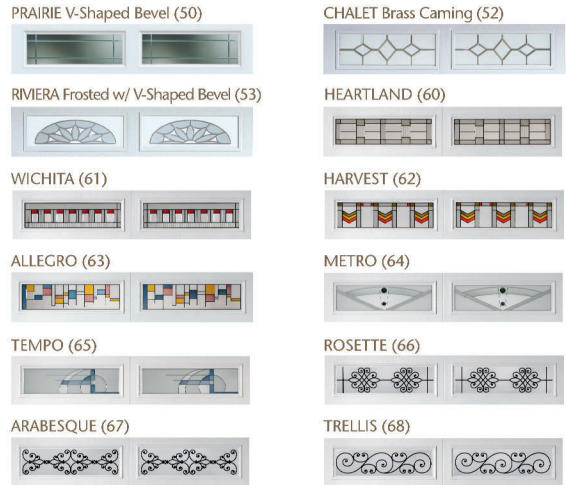

DECORATIVE HARDWARE & LOCK

ALUMINUM Aluminum hinges with clavos not recommended for arched openings.



Specifications

	OAK SUMMIT 1000	OAK SUMMIT 2000	OAK SUMMIT 3000
PANEL DESIGNS	4 Designs	4 Designs	3 Designs
INSULATION ¹		Polystyrene	Polystyrene
R-VALUE ²		6.84	6.58
STEEL THICKNESS	25 ga	25 ga	27/27 ga
Gauge (mm)	0.53mm	0.53mm	0.42/0.42mm
DOOR THICKNESS	2" (5.1cm)	2" (5.1cm)	1 3/8" (3.4cm)
WINDOW GLASS OPTIONS			
3/32" (0.24cm) Single Strength	•	•	•
Obscure	•	•	•
Insulated			•
WIND LOAD AVAILABLE ³	•	•	•
PAINT FINISH ⁴ WARRANTY	15 Years	25 Years	Lifetime
WORKMANSHIP/HARDWARE ⁴ WARRANTY	1 Year	2 Years	3 Years

¹ All insulation has passed fire safety testing. ² Calculated door section R-value is in accordance with DASMA TDS-163. ³ It is your responsibility to make sure your garage door meets local building codes. ⁴ For complete warranty details, visit amarr.com or contact your local Amarr dealer.

COLORS Amarr steel doors arrive pre-painted; for custom colors, exterior latex paint must be used. Visit amarr.com for instructions on painting. Actual paint colors may vary from samples shown.



Oak Summit 1000/2000: True White, Almond, Sandtone, Terratone and Dark Brown
Oak Summit 3000: True White, Almond, Sandtone, Terratone, Brown, Hunter Green, Gray, and Dark or Medium Woodgrain
*Price Upcharge Applies.



165 Carriage Court
Winston-Salem, NC 27105
800.503.DOOR
www.amarr.com

Your Local Amarr Dealer: